


Coated Steel – Prepainted Data Sheet



November 2020. This literature supersedes all previous issues

COLORBOND® Metallic steel

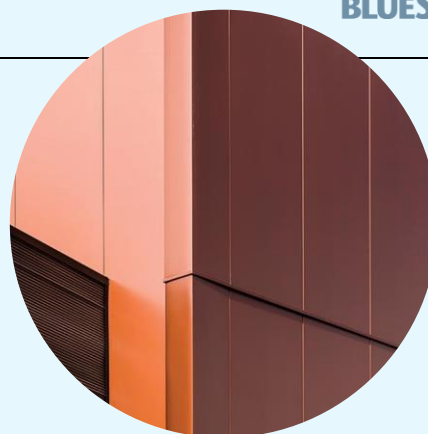

This datasheet applies to COLORBOND® Metallic steel in the colours:

Aries®, Astro®, Callisto®, Capella™, Carrara Gold®, Celestial®, Cetus®, Copernicus®, Cosmic®, Galactic®, Hyperion®, Orion, Rhea®, Teleso™, Umbriel™.

This datasheet is not applicable for the COLORBOND® Metallic steel colours: Axis®, Citi®, Conservatory®, Copper Penny®, Cortex®, Facade®, Gold Rush®, Ringtail™, Silverton™, Skybridge®, Temple Gold®. To obtain datasheets for these colours please contact Steel Direct 1800 064 384

General description

COLORBOND® Metallic prepainted steel has been designed by BlueScope to provide an aesthetically distinctive "metallic" effect.

Typical uses

Exterior applications such as prestigious architectural projects. To determine if warranties apply or for material selection advice, please visit steel.com.au or contact Steel Direct for advice.

Australian and International standards

Substrate - AS 1397-2011
Paint Coating - AS/NZS 2728:2013 Type 3
ISO 9001:2015 Quality System certified


Preferred substrates

AM100 G550S steel with Activate® technology. AM100 G300S steel with Activate® technology {Refer Note 9}

For substrate properties please refer to the relevant Metallic (AM) Coated steel datasheets or AS 1397-2011.

Please refer to current price list or BlueScope State Sales Office for availability of colours and dimensions.

CORSTRIP® protective film may be available on request {Refer Note 4}

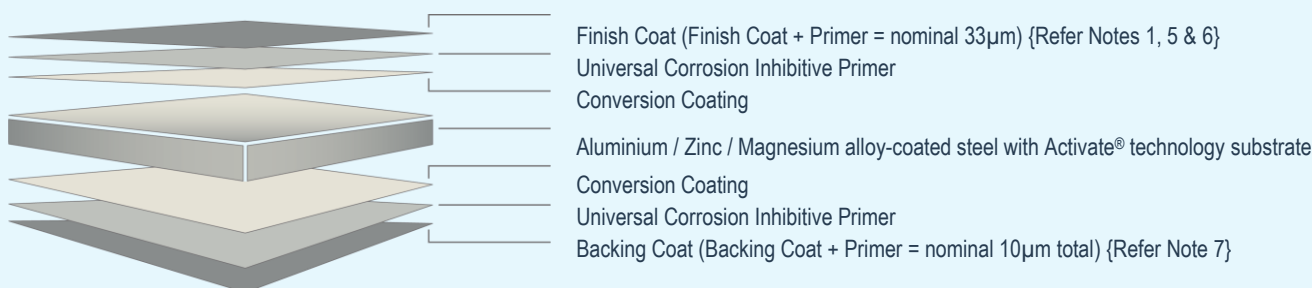

Attributes tested during manufacture

| Property | Test & Evaluation Method(s) | Results |
|-----------------------|--|---------------------------|
| Adhesion | | |
| Reverse Impact | AS/NZS 2728:2013 (App. E) | ≥10 joules |
| T-bend | AS/NZS 2728:2013 (App. F) | Maximum 6T. Refer Note 8. |
| Hardness | | |
| Pencil | AS/NZS 1580.405.1:1996 (2013) | B or harder |
| Specular Gloss | | |
| 60° meter | AS/NZS 1580 602.2:1995 (R2013); ASTM D523-14(2018) (test & eval) | Nominal ± 10 units |

Product Attributes

| Property | Test & Evaluation Method(s) | Results |
|--|--|--|
| Flexibility | | |
| T-bend | ASTM D4145-10 (2018) | Maximum 10T (no cracking). Refer Note 8. |
| Resistance to abrasion | | |
| Scratch | AS 2331.4.7-2006 (R2017) | Typically 2000g |
| Adhesion | | |
| Natural well washed exposure (10 yrs) | AS/NZS 1580.457.1:1996 (R2013) AS/NZS 1580.481.1.10:1998 (R2013) | No flaking or peeling. Refer Notes 10 & 11. |
| Resistance to humidity | | |
| Cleveland (500 hours) | ASTM D4585/D4585M-18; AS/NZS 1580.481.1.9:1998 (R2013) (Blisters); AS 1580.408.4-2004 (R2019) (Adhesion) | Blister density: ≤ 3 . Blister size: $\leq S2$. Undercut from score: ≤ 2 mm. No loss of adhesion or corrosion of base metal. |
| Resistance to corrosion | | |
| QFog (1000 hours) | AS/NZS 1580.481.1.9:1998 (R2013) (Blisters); AS 1580.408.4-2004 (R2019) (Adhesion), AS 1580.481.3-2002 (R2013) (Undercutting, Corrosion) | Blister density: ≤ 2 . Blister size: $\leq S2$. Undercut from score: ≤ 1 mm. No loss of adhesion or corrosion of base metal. Refer Note 3. |
| Resistance to colour change | | |
| Natural well washed exposure (10 yrs) | AS/NZS 1580.457.1:1996 (R2013) & ASTM D2244-16 (Colour) | ΔE CIElab 2000: Light colour: ≤ 4 units. Intermediate colour: ≤ 6 units. Dark colour: ≤ 10 units. Refer Notes 10 & 11. |
| QUV (2000 hours) | ASTM G154-16 & ASTM D2244-16 (Colour) | ΔE CIElab 2000: Intermediate colour: ≤ 5 units. |
| Resistance to chalking | | |
| Natural well washed exposure (10 yrs) | AS/NZS 1580.457.1:1996 (2013) & AS/NZS 1580.481.1.11:1998 (R2013) (Chalk Method B) | Chalk rating: ≤ 4 . Refer Notes 10 & 11. |
| QUV (2000 hours) | ASTM G154-16 & AS/NZS 1580.481.1.11:1998 (R2013) (Chalk Method B) | Chalk rating: ≤ 4 range |
| Resistance to solvents, acids, alkalis | | |
| Exposure | ASTM D1308-02 (2013) (3.1.1); ASTM D2244-16 (Colour); AS/NZS 1580.481.1.9:1998 (R2013) (Blisters) | No discolouration or blistering. Refer Notes 3, 10 & 12. |
| Fire hazard properties | | |
| Simultaneous determination of ignitability, flame propagation, heat release and smoke release (AS/NZS 1530.3:1999 (R2016)) | Ignitability index (0 – 20) | 0 |
| | Spread of flame index (0 – 10) | 0 |
| | Heat evolved index (0 – 10) | 0 |
| | Smoke developed index (0 – 10) | 2 |
| NCC non-combustible material concessions (NCC 2019; AS/NZS 1530.3:1999 (R2016)) | National Construction Code, Building Code of Australia 2019; Volume 1 Part C1.9.e, and Volume 2: Part 3.7.1.1.e | May be used wherever a non-combustible material is required |
| | AS/NZS 1530.3:1999 (R2016) | |
| Combustibility test for materials (steel substrate) (AS 1530.1-1994 (R2016)) | AS 1530.1-1994 (R2016) | Not deemed combustible (steel substrate) |
| Resistance to heat | | |
| Exposure 100°C continuous (500 hrs) | ASTM D2244-16 (Colour) | Colour change: ΔE CIElab 2000: ≤ 3 units. |

Important notes

1. Due to inherent directional appearance properties of COLORBOND® Metallic steel, the product is branded on the reverse side with arrows. This permits correct panel alignment and consistent visual appearance. All components of any given project should be sourced from the same order. Contact Steel Direct for further advice.
2. All warranties for a product, if any, are subject to eligibility. Terms and conditions apply. Nothing in this document is intended by BlueScope to extend, modify or otherwise affect any stated product warranty. To find out more, please visit the BlueScope website or contact Steel Direct for advice.
3. Product may not be suitable if it is intended to use COLORBOND® Metallic steel in an exterior application within 1km of salt marine locations, severe industrial or abnormally corrosive environments; in areas not washed by rain, or in applications where it will be wholly or partly buried in the ground. For selection of the most appropriate COLORBOND® steel product, please refer to Technical Bulletins TB1a, TB1b, CTB16, CTB21 and CTB22. Before purchase, you should check on suitability by visiting the BlueScope website or by contacting Steel Direct for advice.
4. The CORSTRIP® protective film should be removed from the painted steel strip immediately on installation. Sunlight can increase adhesion of the protective film to the painted surface if left uncovered outside.
5. Finish Coat - the coating applied to the exposed surface of the prepainted coil which is expected to meet the Performance Requirements.
6. The product is supplied with a nominal 25 unit (60°) gloss Finish Coat
7. Backing Coat - a thin coating applied to the reverse surface of the prepainted coil. It also gives additional durability to the reverse surface during the service life of the product, but for aesthetic reasons is not recommended for exposure to sunlight. Performance Requirements are generally not applicable to backing coats. Where specific Performance Requirements are deemed necessary for the reverse surface coating, a "double sided" product should be specified, in which case a topcoat of full nominal thickness will be applied.
8. The minimum internal bend diameters for forming processes to achieve no paint cracking (visible using x10 magnification) and to avoid paint adhesion issues are specified by the T-bend flexibility and T-bend adhesion results respectively- where 1T equals the total coated thickness (tct) in mm of the material. These results are based on testing at 20-25°C.
9. For most products, the metallurgical ageing process which is inherent in the paint stoving cycle will result in some loss of ductility compared with unpainted product. However, minimum strength levels designated by relevant standards will still be applicable.
10. Improper storage or use of non-approved roll-forming lubricants may cause brand transfer and paint blushing, and may adversely affect colour and long term durability. Product in coil or sheet pack form must be kept dry. If the coil or sheet pack becomes wet, it must be separated and dried (refer AS/NZS 2728:2013 Appendix L, and also Technical Bulletin TB7). Contact Steel Direct to obtain advice on appropriate rollforming lubricants.
11. Values quoted are for panels exposed in accordance with AS/NZS 2728:2013. Variations for in-situ performance may occur due to complexity of building design and location.
12. COLORBOND® Metallic steel has good resistance to accidental spillage of solvents such as methylated spirits, white spirit, mineral turpentine, toluene, trichloroethylene and dilute mineral acids and alkalis. However, all spillages should be immediately removed by water washing and drying.

Colorbond®
METALLIC

steel.com.au

To learn more about this product

1800 064 384

steeldirect@bluescopesteel.com

For more information contact Steel Direct

